



SUMMARY TEST REPORT

Report Number.....: **211205BW001-1210-EG-004**

Total pages.....: 19

Tested by (name + signature).....: Lukes Lin / Senior engineer

Approved by (name + signature).....: Jack Shi / Senior engineer

Date of issue: 2022-01-06



Applicant's name: Shenzhen SOFARSOLAR Co., Ltd.

Address: 11/F., Gaoxinqi Technology Building, No.67 Area, Xingdong Community, Xin'an Sub-district, Bao'an District, Shenzhen City, China

Manufacturer: Same as applicant

Address: Same as applicant

Testing laboratory name: Guangdong HuaChuang Technology Service Co., Ltd.

Address: Room 815, No.122, Houjie Road (West), Houjie Town, Dongguan City, Guangdong, 523960, People's Republic of China

Testing Location/ Address.....: Same Above


Test specification:

Standard: According to client's requirement

Test Report Form No.....: SUMMARY TEST REPORT VER.1.0

This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. The report would be invalid without specific stamp of test institute and the signatures of tester and approver.

Issued by: Guangdong HuaChuang Technology Service Co., Ltd.
 Address: Room 815, No.122, Houjie Road (West), Houjie Town, Dongguan City, Guangdong, 523960 P.R.C
 Tel: +86 769 85598986 E-Mail: service-hc@huachuang-ts.com Web: www.huachuang-ts.com

Product name	Solar Grid-tied Inverter
Trademark	
Factory's name	Dongguan SOFAR SOLAR Co., Ltd.
Factory address.....	1F-6F, Building E,NO.1 JinQi Road,Bihu Industrial Park,Wulian Village,Fenggang Town,Dongguan City.

Model/Type reference	SOFAR 100KTL-HV
----------------------------	------------------------

Ratings:	
Input DC voltage range [V]	180 -1100
Max. input DC current [A]	10*26
Nominal output AC voltage [V]	500Vac, 3W + PE; 50 Hz
Nominal. output AC current [A]	116A
Max. output AC current [A]	128A
Nominal active output power [kW].....	100kW
Max. apparent output power [kVA]....	110kVA
Software version.....	V020010


Contents

Revision history of test report.....	4
Copy of marking plate.....	5
General remarks - documentation.....	6
General product information.....	7
Annex 1 – Test Results	9
Impedance at 175 Hz	10
Behavior in case of short inverter output circuit	10
Harmonic	11
Annex 2 – Pictures of the unit	13
Annex 3 – Test equipment list	17

Revision history of test report

Issued Date	Description	Revision No.
2022-01-06	Initial issue.	V1.0

Copy of marking plate


Solar Grid-tied Inverter

Model No:	SOFAR 100KTL-HV
Max.DC Input Voltage	1100V
Operating MPPT Voltage Range	180~1000V
Max. Input Current	10*26A
Max. PV Isc	10*40A
Rated Grid Voltage	3/PE,500Vac
Max.Output Current	128A
Rated Grid Frequency	50/60Hz
Rated Output Power	100KW
Max.Output Power	110KVA
Power Factor	1(adjustable+/-0.8)
Ingress Protection	IP66
Operating Temperature Range	-30°C~+60°C
Protective Class	Class I
Overvoltage Category	AC III,DC II
Made in China	

Manufacturer : Shenzhen SOFARSOLAR Co.,Ltd.
 Address : 11/F., Gaoxinqi Technology Building, No.67 Area,
 Xingdong Community, Xin'an Sub-district,
 Bao'an District, Shenzhen City,China
 VDE0126-1-1,VDE-AR-N4105,G99,IEC61727
 IEC62116,AS4777



General remarks - documentation**Possible test case verdicts**

Test case does not apply to the test object ...: N/A

Test case is not rated: N/R

Test item does meet the requirement: P (Pass)

Test item does not meet the requirement: F (Fail)

Testing

Date of receipt of test items: 2021-12-10

Date(s) of performance of tests: 2021-12-10 to 2021-12-29

General remarks:

The test result presented in this report relate only to the object(s) tested. This report shall not be reproduced in part or in full without the written approval of the issuing testing laboratory.

"(see Annex #)" refers to additional information appended to the report.

"(see appended table)" refers to a table appended to the report.

Throughout this report a comma / point is used as the decimal separator.

Conformity statements are decided in accordance with IEC GUIDE 115:2021 Procedure 2 (accuracy method), unless otherwise normatively specified or contractually agreed.

General product information

Equipment mobility	Permanent connection
Operating condition.....	Continuous
Class of equipment.....	Class I
Protection against ingress of water.....	IP66 according to EN 60529
Mass of equipment [kg].....	Approximately 90kg

The **SOFAR 100KTL-HV** is a three-phase Power Conversion System (PCS) for PV grid-connected application. Via an external generator transformer / step up transformer the **SOFAR 100KTL-HV** can connect to the grid or loads (see *Figure 1*)

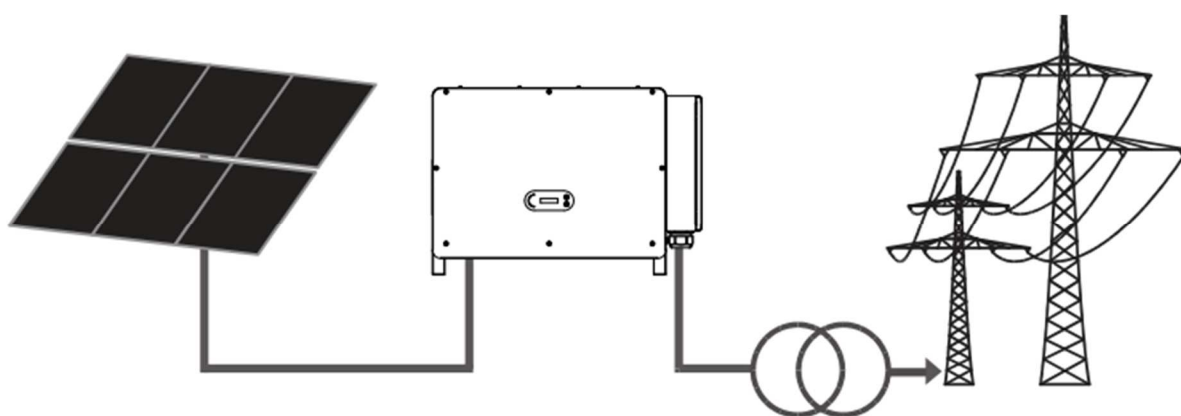


Figure 1 – Scheme of an installation

Hardware version:

The product was tested on following HW revision:

V002

Software version:

The product was tested on:

FW: V020010

General product information
Description of the power circuit (Figure 2):

The input and output of the unit are protected by varistors to Earth. The unit is providing EMC filtering at the batteries input and output toward mains. The unit does not provide galvanic separation from input to output (transformerless).


The output is switched off redundantly by the high-power switching bridge and two relays in series. When single fault applied to one relay, alarm an error code in display panel, another redundant relay provides basic insulation maintained between the battery and the mains. All the relays are tested before each start up.

The internal control is redundant built. It consists of Microcontroller Main DSP (U2) and slave DSP (U16). The Main DSP (U2) control the relays by switching signals; measures the battery voltage, battery current, Bus voltage, grid voltage, frequency, AC current with injected DC and the array insulation resistance to ground. In addition, it tests the current sensors and the RCMU circuit before each start up.

The slave DSP (U16) is measuring the grid voltage, grid frequency and residual current, also can switch off the relays independently, and communicate with Main DSP (U2) each other.

The current is measured by a current sensor. The AC current signal and the injected DC current signal are sent to the Main DSP (U2). The Main DSP (U2) tests and calibrates before each start up all current sensors.

The unit provides two relays in series in all output conductors.

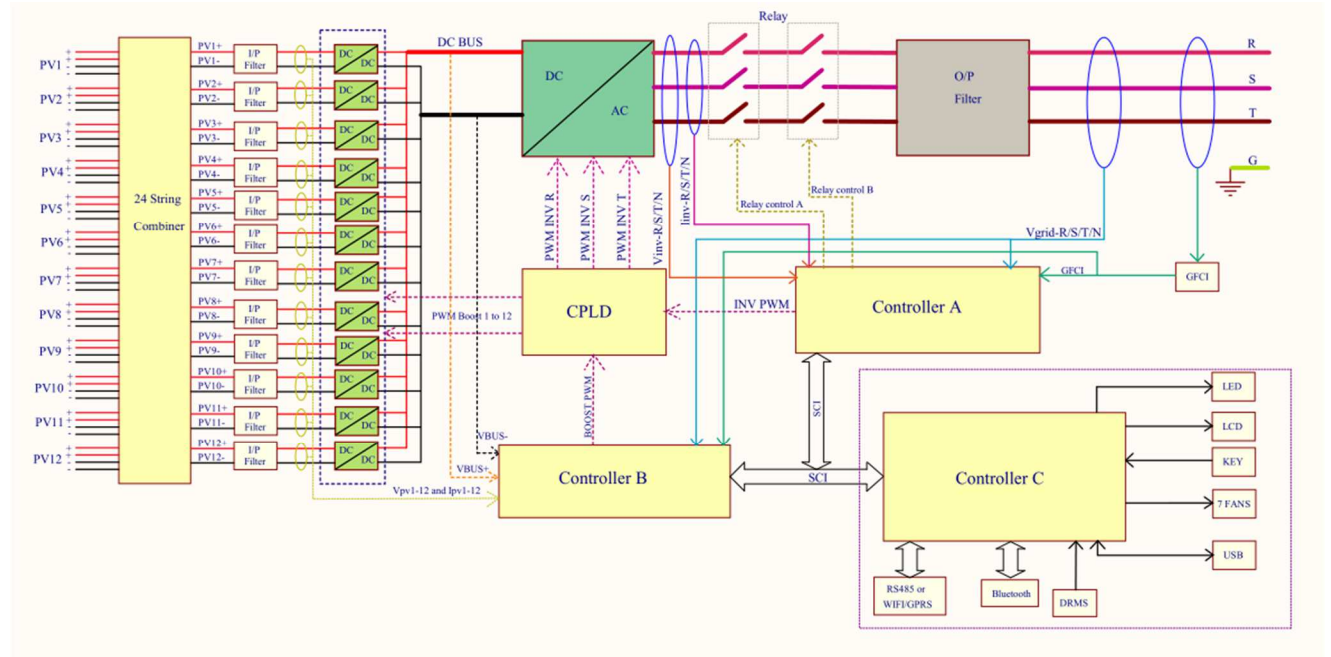
Figure 2 – Block diagram



Annex 1 – Test Results

Impedance at 175 Hz
Test results:

Impedance of the converter at 175 Hz - R and X in ohm, give the values on the LV side (not taken into account of the transformer)	<input checked="" type="checkbox"/> Serial equivalent schema	$R_{175\text{Hz}}=0,17 \ \Omega$
	<input type="checkbox"/> Parallel equivalent schema	$X_{175 \text{ Hz}}=0,50 \ \Omega$

Behavior in case of short inverter output circuit
Test results:

Values measured at the output of the aero generator, give the values on the LV side (Not taken into account of the transformer)	$I_p = 344,8 \ \text{A}$
	$I_{k''} = 116,3 \ \text{A}$

Harmonic
Test results:

Harmonics	Current Magnitude [A]			% of Fundamental			Phase	Harmonic Current Limits [%]
	L1	L2	L3	L1	L2	L3		
1st	115,533	115,477	115,610	100,000	100,000	100,000	Three phase	--
2nd	0,019	0,014	0,021	0,017	0,012	0,018	Three phase	1
3rd	0,045	0,047	0,035	0,039	0,041	0,030	Three phase	4
4th	0,023	0,029	0,026	0,020	0,025	0,023	Three phase	1
5th	0,350	0,343	0,375	0,303	0,297	0,324	Three phase	4
6th	0,009	0,010	0,013	0,008	0,008	0,011	Three phase	1
7th	0,284	0,267	0,289	0,246	0,231	0,250	Three phase	4
8th	0,012	0,015	0,018	0,010	0,013	0,015	Three phase	1
9th	0,061	0,014	0,044	0,053	0,012	0,038	Three phase	4
10th	0,011	0,011	0,011	0,009	0,009	0,010	Three phase	0,5
11th	0,287	0,244	0,286	0,248	0,211	0,247	Three phase	2
12th	0,012	0,009	0,014	0,011	0,008	0,012	Three phase	0,5
13th	0,223	0,235	0,227	0,193	0,203	0,196	Three phase	2
14th	0,011	0,011	0,012	0,010	0,010	0,010	Three phase	0,5
15th	0,032	0,021	0,020	0,028	0,018	0,018	Three phase	2
16th	0,010	0,012	0,010	0,008	0,011	0,008	Three phase	0,5
17th	0,124	0,099	0,138	0,107	0,086	0,120	Three phase	1,5
18th	0,009	0,008	0,010	0,008	0,007	0,009	Three phase	0,5
19th	0,092	0,104	0,101	0,079	0,090	0,087	Three phase	1,5
20th	0,009	0,010	0,012	0,008	0,009	0,010	Three phase	0,5
21th	0,015	0,023	0,016	0,013	0,020	0,014	Three phase	1,5
22th	0,007	0,008	0,009	0,006	0,007	0,008	Three phase	0,5
23th	0,021	0,042	0,029	0,018	0,037	0,025	Three phase	0,6
24th	0,008	0,008	0,009	0,007	0,007	0,008	Three phase	0,5
25th	0,063	0,051	0,052	0,054	0,044	0,045	Three phase	0,6
26th	0,007	0,007	0,011	0,006	0,006	0,009	Three phase	0,5
27th	0,017	0,015	0,014	0,014	0,013	0,012	Three phase	0,6
28th	0,007	0,009	0,008	0,006	0,008	0,007	Three phase	0,5
29th	0,118	0,113	0,104	0,102	0,097	0,090	Three phase	0,6
30th	0,006	0,008	0,008	0,006	0,007	0,007	Three phase	0,5
31th	0,114	0,119	0,115	0,099	0,103	0,100	Three phase	0,6
32th	0,009	0,008	0,010	0,007	0,007	0,008	Three phase	0,5
33th	0,012	0,011	0,016	0,010	0,009	0,014	Three phase	0,6

Harmonic								
34th	0,009	0,009	0,009	0,008	0,008	0,008	Three phase	--
35th	0,127	0,117	0,114	0,110	0,102	0,099	Three phase	--
36th	0,007	0,008	0,008	0,006	0,007	0,007	Three phase	--
37th	0,106	0,112	0,121	0,091	0,097	0,105	Three phase	--
38th	0,009	0,011	0,009	0,008	0,009	0,008	Three phase	--
39th	0,009	0,014	0,015	0,008	0,012	0,013	Three phase	--
40th	0,008	0,009	0,008	0,007	0,008	0,007	Three phase	--
41th	0,092	0,087	0,084	0,079	0,075	0,073	Three phase	--
42th	0,006	0,006	0,007	0,005	0,006	0,006	Three phase	--
43th	0,068	0,071	0,081	0,059	0,061	0,070	Three phase	--
44th	0,007	0,007	0,007	0,006	0,006	0,006	Three phase	--
45th	0,014	0,017	0,013	0,012	0,015	0,012	Three phase	--
46th	0,006	0,006	0,007	0,005	0,005	0,006	Three phase	--
47th	0,060	0,057	0,052	0,052	0,049	0,045	Three phase	--
48th	0,005	0,006	0,006	0,005	0,005	0,005	Three phase	--
49th	0,039	0,036	0,046	0,034	0,032	0,039	Three phase	--
50th	0,006	0,006	0,006	0,005	0,006	0,005	Three phase	--
THD50[%]	--	--	--	0,578	0,578	0,578	--	--
Note:								



Annex 2 – Pictures of the unit

Enclosure front view



Left side view



Right side view




Enclosure top view



Enclosure bottom view



Enclosure rear view

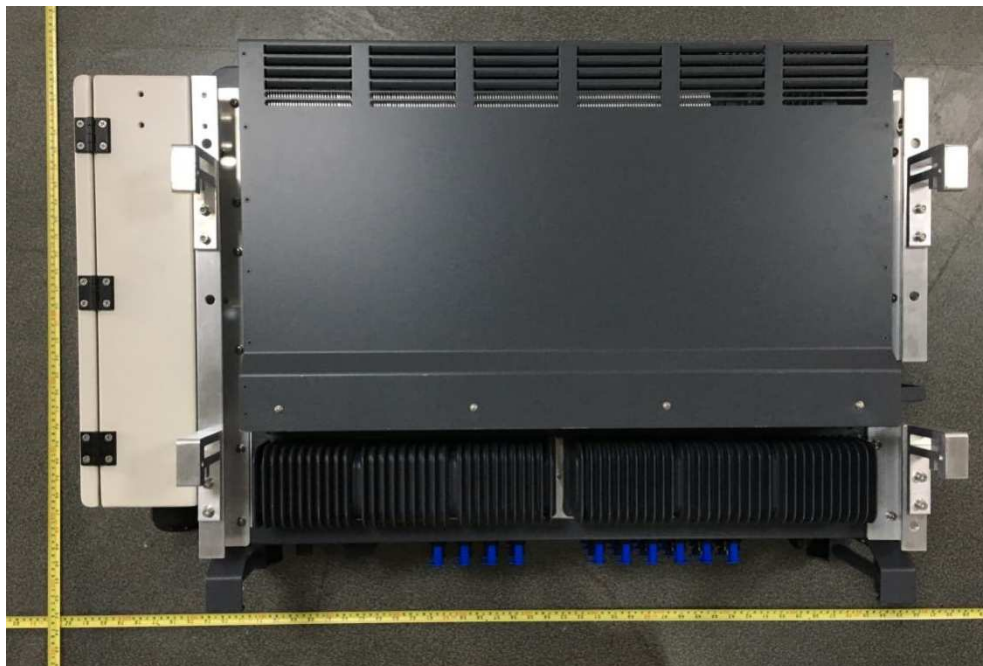



Annex 3 – Test equipment list

Date(s) of performance of tests: 2021-12-10 to 2021-12-29

Equipment	Internal No.	Manufacturer	Type	Serial No.	Next Calibration date
AC Source	SB9540/03	APC	AFG-S-33150T	C312020029	Monitored by Power Analyzer
DC Simulation Power Supply	SB11175	KEWELL	IVS-300-1000	602003131200460	
RLC Load	SB9605	Qunling	ACLT-3830H	--	
Power Analyzer	SB11178	YOKOGAWA	WT3000	91P215776	2022-03-14
Eight Channel Digital Phosphor Oscilloscope	SB11177	YOKOGAWA	DL850	91P215763	2022-11-29
Oscilloscope probe	SB9148	TEKTRONIX	A622	08JJ35694DV	2022-11-30
	SB11203	TEKTRONIX	A621	10JJ37370DV	2022-11-30
	SB11205	YOKOGAWA	96001	23P1019	2022-07-13
	SB11207	YOKOGAWA	96001	23N9037	2022-07-13
Current transducer	SB11179/01	YOKOGAWA	CT1000	1132540023	2022-03-15
	SB11179/02	YOKOGAWA	CT1000	1132320003	2022-03-15
	SB11179/03	YOKOGAWA	CT1000	1132320004	2022-03-15
	SB11179/04	YOKOGAWA	CT1000	1132540009	2022-03-15



End of Test Report